

PMD 5050S



FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point



Principales Características

Frecuencia	Hz	50
Voltaje	V	400
Fases		3
Potencia Máxima	watt	4000
Potencia nominal	watt	3600



Potencia Monofasica


Voltaje	V	230
Potencia Máxima Monofásica	watt	1330
Potencia nominal monofásica	watt	1200

Motor		
Marca		Pramac
Tipo		OHV
Velocidad de funcionamiento nominal	rpm	3000
Combustible		Diésel
Sistema de arranque		Eléctrico
Deposito de aceite	l	1.65
Sistema de protección por bajo nivel de aceite		√



Alternador		
Regulación Voltaje		AVR

Dimensiones		
Longitud	(L) mm	910
Ancho	(W) mm	518
Altura	(H) mm	682
Peso seco	kg	185
Dimensión de caja de cartón LxWxH	mm	950x570x765

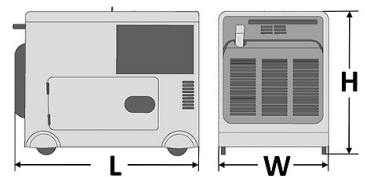

Autonomía		
Capacidad de tanque de combustible		14.5
Consumición de combustible @ 50%	l/h	1.28
Autonomía al 50%	h	11.3



Nivel sonoro		
Nivel sonoro garantizado (LWA)	dBA	97
Nivel de presión de ruido @ 7 mt	dBA	69

CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS:

- Start selector switch with key: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

OUTPUT:

- Battery Charger 12V DC

ENCHUFES

SCHUKO 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1

La información está alineada con el archivo de datos en el momento de la descarga.
Impreso en 13/05/2025 (ID 10764)